

## Leaders in gate automation products

• Convenient • Improves Security • Saves Time • Unbeatable Value • Reliable Peace of Mind

## SW600 Swing OPERATOR



## **SPECIAL PROTECTION**

Our system is equipped with a high current sensor controller to protect the DC motor, lock coil, and gear box from damage and hence enabling a lifespan 3 times of the conventional type.

## **Control Board Features**


230VAC/24AC/DC 24VDC Yes Yes 6-9 Watt 1 or 2 1000 IP44 3 Amp Yes Yes
24VDC Yes Yes 6-9 Watt 1 or 2 1000 IP44 3 Amp Yes
Yes Yes 6-9 Watt 1 or 2 1000 IP44 3 Amp Yes
Yes 6-9 Watt 1 or 2 1000 IP44 3 Amp Yes
6-9 Watt 1 or 2 1000 IP44 3 Amp Yes
1 or 2 1000 IP44 3 Amp Yes
1000 IP44 3 Amp Yes
IP44 3 Amp Yes
3 Amp Yes
Yes
Yes
Yes
Optional
2x12V/7.0AH
80 cycle
Yes
Yes
Yes
300mA
Yes
Optional
Yes



Operating Voltage	DC 24V Supply
Output Power	120W / DC Motor
Max. Weight of Gate	300/600kg heavy duty
Rotary Speed	8sec. / 90 degree
Transmission Type	Rotary Lever 360 degree
Dual Speed	Yes
Safety Device	Mechanical Clutch (Patented)
IR Safety Beam	Optional
Safety Limit Timer	Yes. High Current Sensor (Master timer)
Automatic Lighting Control	Yes including photo sensor control
Remote Controller	2 channel UHF PWM
Electric Lock	Yes



UK PATENT NO.: 2264534 MY 108093 - A

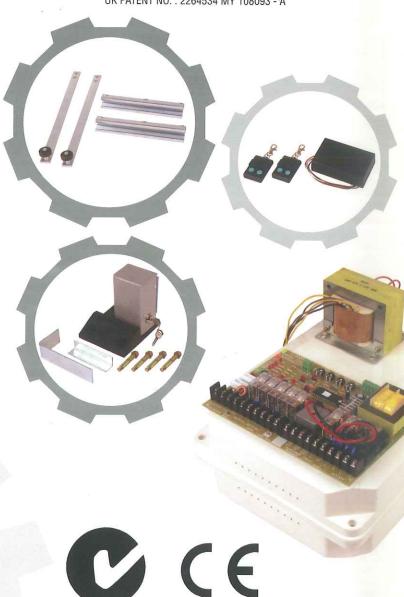

Due to our continuous improvement to our products, some specifications may be different from the list. Some features may not be available due to differences among our marketing zones and may also due to some restriction from local authority of your country. Please refer to the local authorised dealer for details.

For more details please contact