

ED7208TEL / ED7216TEL

HD CCTV OVER COAX



CMS

A. Main Interface



B. Play Back




C. Device Manager



Mobile Client



a. Login



b. Main Interface




c. Mobile CMS



d. Playback

Web Browser Support

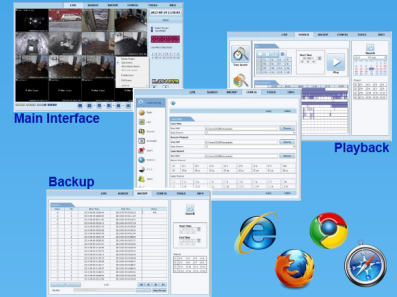

Features:

- * 8 / 16 CH HD TVI video input, 1080P recording
- * Playback: 4 / 8 CH simultaneously playback; HDMI 1080P output
- * Backup: USB, IE, CMS; support multi-file, file cutting when backup
- * Pentaplex: live, record, playback, backup and remote operation
- * DHCP, DDNS, PPPoE Network protocol, IE browse and CMS supported
- * Dual stream technology; Multi-user online simultaneously
- * Support PTZ preset and auto cruise, up to 128 presets and 8 cruises
- * Cell phone: iPhone, Android



HD



H.264



DDNS



Network



PTZ



Audio



MIC



Mobile



CMS



USB



Mouse



E-mail



<http://www.alma-asia.com>

Design and specifications are subject to change without notice.

HD CCTV OVER COAX

ED7208TEL / ED7216TEL

Specifications


Model		ED7208TEL	ED7216TEL	
System	Compression	H.264 High profile		
	CPU	Cortex A9		
	OS	Embedded Linux		
Video	Input	BNC*8	BNC*16	
	Output	HDMI*1:1080P(1920*1080) VGA*1:1080P(1920*1080)		
Audio	Input	RCA*1		
	Output	RCA*1		
	dual-way audio	Take up 1CH audio input		
Record	Resolution	720P:1280*720 ; 1080P:1920x1080		
	Frame rate (fps)	720P	200(PAL) 240(NTSC)	400(PAL) 480(NTSC)
		1080P	100(PAL) 120(NTSC)	200(PAL) 240(NTSC)
	Bit Rate:	1M~6Mbps		
	Encode	VBR/CBR		
	Quality	6 level		
	Mode	Manual, Timer, Motion		
	File manage	Lock, unlock, reserving time		
Play	Playback	4CH	8CH	
	Search	Time,motion,single or multi-channel		
	Function	Play, Pause, FF, FB.Digital zoom		
Alarm	Mode	Motion, Video Loss		
	Input	NO		
	Output	NO		
	Triggering	Record, PTZ move, e-mail, etc		
Network	Interface	RJ45		
	Protocal	TCP/IP, UDP, DHCP, DNS, PPPOE, DDNS		
	Others	10users online,dual stream		
Cell phone	OS	iPhone, Andriod		
	Function	Multi-channel display,server list,recording,PTZ,etc.		
I/O	HDD	SATAx 2		
	RS485	RS485*1, connect to PTZ or keyboard		
	USB	USB2.0 x 2, one for mouse and another for backup		
	IR controller	Optional		
Others	Power supply	DC12V		
	Dimensions	430mm *300mm *55mm (W*D* H)		
	Working Environment	-10~50°C, 10%~90% (Humidity)		

Design and specifications are subject to change without notice.



ALMA TECHNOLOGY SDN. BHD. (1033193-K)
No. 13, Jalan Sakeh 1, 84000 Muar, Johor, Malaysia.
Tel : 1300 88 ALMA (2562), +606-9511314, +6016-7331401
Fax : +606-9541113
www.alma-asia.com www.almacctv.com

DISTRIBUTED BY



Kuala Lumpur Office:
KA 3-2-2, 1st Floor, Kuchai Avenue, Jln Kuchai Maju 13,
Off Jln Kuchai Lama, Kuchai Entrepreneur Park,
58000 Kuala Lumpur.
Tel / Fax : +603-79715483

Johor Bahru Office:
No. 101, Jalan Seri Impian 1, Taman Impian Emas,
81300 Skudai, Johor, Malaysia.
Tel : +607-5561320